

**[OEBSL-ASE]**

(ASE based)

## Broadband Light Sources (890 nm)

**Features:**

- Wide wavelength range
- ASE
- Low noise
- Turn-key solution
- Cost effective solution

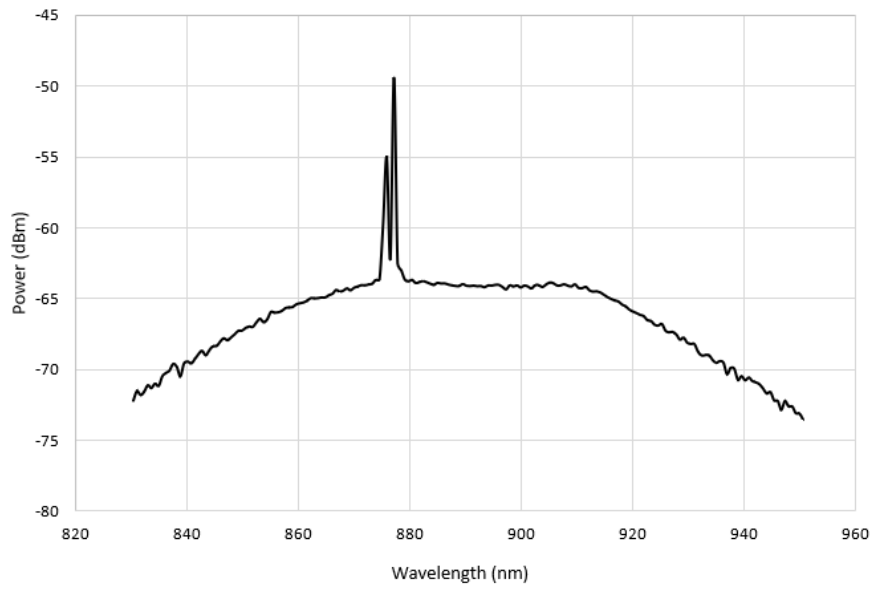

**OEBSL-ASE**
**Applications:**

- Polarization measurement
- Components/modules testing
- Optical Fiber Sensors
- Biomedical Applications

**Product description:**

OEBSL-ASE is a Broadband Light Sources (CW) based on the Amplified Spontaneous Emission (ASE) principle that uses a laser to pump a Praseodymium (III) fluoride ZBLAN fiber. The broadband light source with output power of few mW can be used for testing optical components, gas sensing, as well as biomedical applications.

Parameter	Unit	OEBSL-ASE-890
Center WL	nm	890
Bandwidth (-10 dB)	nm	> 40
Output power	mW	> 5
Power stability	%	5
Polarization state	-	Random; Linear
Output fiber type	-	SM; PM
Connector	-	FC/APC; custom
Operating temperature	°C	10-50
Dimensions (Turn-key)	mm <sup>3</sup>	70 x 190 x 310



**OEBSL-100-890**

**OEBSL-ASE-890**

Ordering number:

<b>OEBSL-ASE-WL-P:</b>	WL	P
	890	Average power (mW)
Example:	OEBSL-ASE-890-5	